

Machine Rating

Rated operating capacity (ISO 14397-1)	944 kg
Tipping load (ISO 14397-1):	1888 kg
Pump capacity	64.70 L/min
Pump capacity (with high flow option)	101.10 L/min
System relief at quick couplers	23.8-24.5 MPa
Max. travel speed (high range - option)	17.3 km/h
Max. travel speed (low range)	11.8 km/h

Engine

Make / Model	Kubota / V2607-DI-T-E3B-BC-2
Fuel	Diesel
Cooling	Liquid
Power at 2700 RPM (SAE J1995):	45.5 kW
Torque at 1425 RPM (SAE J1 995 Gross)	201.0 Nm
Number of cylinders	4
Displacement	2600 cm ³
Fuel tank	93.70 L

Weights

Operating weight	2900 kg
Shipping weight	2650 kg

Controls

Vehicle steering	Direction and speed controlled by two hand levers or optional Advanced Control System (ACS), Advanced Hand Controls (AHC) or Selectable Joystick Controls (SJC)
Loader hydraulics tilt and lift	Separate foot pedals or optional Advanced Control System (ACS), Advanced Hand Controls (AHC) or Selectable Joystick Controls (SJC)
Front auxiliary (standard)	Electrical switch on right-hand steering lever

Drive System

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---

Standard Features

Cushion suspension seat	Lift arm support
Automatically activated glow plugs	Noise reduction kit
Auxiliary hydraulics: variable flow/maximum flow	Work lights, front and rear
Bob-Tach™ frame	Parking brake
Bobcat Interlock Control System (BICS)	Seat belt
Deluxe operator cab* Includes interior cab foam, side, top and rear windows, Deluxe wire harness, dome light, and electrical power port, cup holder, storage place, horn ¹	Seat bar
Electrically activated proportional front auxiliary hydraulics	Spark arrestor muffler
Engine/hydraulics system shutdown	10 x 16.5, 10-ply, Heavy duty tyres
Hydraulic bucket positioning (including ON/OFF switch)	CE certification
Instrumentation	Warranty: 12 months or 2000 hours (whichever occurs first)

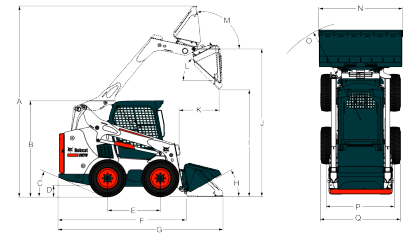
1. Roll Over Protective Structure (ROPS) – meets requirements of SAE-J1040 and ISO 3471; Falling Object Protective Structure (FOPS) - meets requirements of SAE-J1043 and ISO 3449, Level I

Options

High-Flow hydraulics	Advanced Hand Controls (AHC)
Deluxe instrument panel	Selectable Joystick Controls (SJC)
Power Bob-Tach™	Two speed
Cab enclosure with heating	Air ride seat with 2 point seat belt
Cab enclosure with HVAC	Back-up alarm
10 x 16.5, 10-ply, Heavy duty tyres, offset rims	Beacon
10 x 16.5, 10-ply, Severe duty tyres	Engine block heater
12 x 16.5, 12-ply, Severe duty tyres, poly filled	Fire extinguisher
12 x 16.5, Solid flex tyres	Radio
31 x 12-16.5, 10-ply, Superflotation tyres	Road kit
Advanced Control System (ACS)	Strobe

Environmental

Fuel consumption at 100% engine load	12.90 L/h
--------------------------------------	-----------

Dimensions


(A) 3901.0 mm	(J) 3023.0 mm
(B) 1972.0 mm	(K) 828.0 mm
(C) 24°	(L) 42°
(D) 185.0 mm	(M) 97°
(E) 1082.0 mm	(N) 1727.0 mm
(F) 2657.0 mm	(O) 2024.0 mm
(G) 3378.0 mm	(P) 1374.0 mm
(H) 30°	(Q) 1643.0 mm
(I) 2319.0 mm	

Attachments

Angle Brooms	Planers
Augers	Root Grapples
Backhoes	Rotary Cutters
Bale Forks	Rotary Grinders
Box Blades	Scarifiers
Breakers	Scrapers
Brush Saws	Seeders
Bucket Adapters	Skeleton Buckets
Chippers	Snow & Light Material Buckets
Combination Buckets	Buckets
Concrete Mixers	Snow Blades
Concrete Pumps	Snowblowers
Construction / Industrial Buckets	Snow Pushers
Diggers	Snow V-Blades
Dozer Blades	Sod Layers
Drop Hammers	Soil Conditioners
Dumping Hoppers	Spare Wheels
Fertilizer Buckets	Spreaders
Flail Cutters	Stabilizers
General Purpose Buckets	Stump Grinders
Graders	Sweepers
Grapples, Industrial	Tillers
Landplanes	Tilt-Tatch
Landscape Rakes	Tracks
Laser Equipment	Tree Transplanters
Low Profile Buckets	Trench Compactors
Miscellaneous	Trenchers
Mixing Buckets	Utility Forks
Mowers	Utility Frames
Packer Wheels	Vibratory Rollers
Pallet Forks, Hydraulic	Water Kits
Pallet Forks, Standard	Wheel Saws
	Whisker Brooms